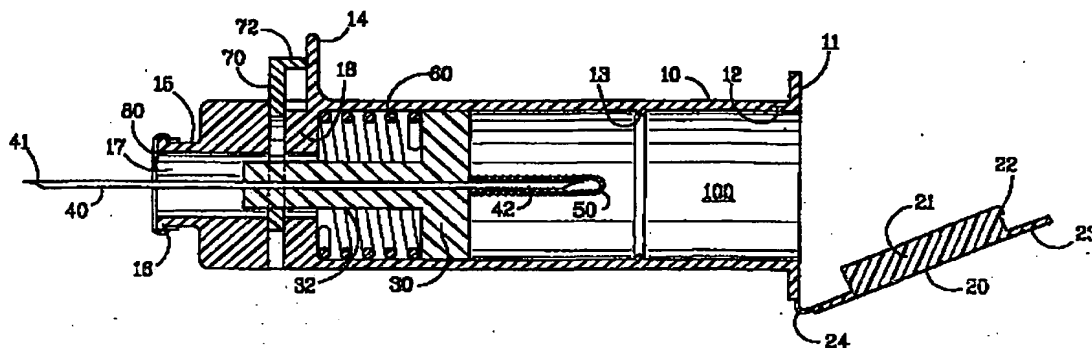


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>A61M 5/00</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/41249</b> <b>(43) International Publication Date:</b> 24 September 1998 (24.09.98)
<b>(21) International Application Number:</b> PCT/US98/04616 <b>(22) International Filing Date:</b> 9 March 1998 (09.03.98) <b>(30) Priority Data:</b> 08/819,568 14 March 1997 (14.03.97) US <b>(71)(72) Applicants and Inventors:</b> JOHNSON, Kenneth, H. [US/US]; P.O. Box 630708, Houston, TX 77263 (US). MOSELEY, Richard, L. [US/US]; P.O. Box 630708, Houston, TX 77263 (US). <b>(74) Agent:</b> JOHNSON, Kenneth, H.; P.O. Box 630708, Houston, TX 77263 (US).	<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GR, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	

**(54) Title:** SPRING LOADED RETRACTABLE CANNULA BLOOD DRAWING DEVICE**(57) Abstract**

A blood collection device for use with vacuum sample tube is provided having a retractable carrier for a double cannula (40). A compress spring (60) is mounted between the carrier and the proximal end of the barrel (10) to bias the carrier backward into the barrel. A releasable retaining means (71) is provided to retain the carrier in the proximal end with one end of the double cannula exposed for use. When the retaining means is released the carrier is automatically retracted into the barrel. A cap (20) is provided to cover the original open end, and releasable puncture pad covers the proximal end after the carrier has been retracted.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Switzerland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KR	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Licchtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**SPRING LOADED RETRACTABLE CANNULA BLOOD DRAWING DEVICE  
BACKGROUND OF THE INVENTION**

**Field of the Invention**

The present invention relates to devices used to withdraw blood into vacuum tubes for testing. More particularly the invention relates to a device to which a double ended cannula is attached and for receiving the vacuum tube which is pierced by one of the cannula, the other end being inserted into the subject's vein. Most particularly the invention relates to a blood drawing device in which the cannula may be withdrawn into the device and the device closed after use.

**Related Information**

The advent of the AIDS virus has focused attention on diseases which are transmitted by contact with contaminated blood. Many devices are now available on the market to reduce the likelihood of such contact. More particularly there have been devices for retracting the needles of hypodermic syringes into the barrel after use as exemplified in U.S. patents 4,790,822; 4,950,251 and 5,152,750. Additionally the insertion cannula of a catheter has also been made retractable as in U.S. patent 5,019,049.

Until recently no one has addressed the problem associated with withdrawing blood samples from patients for subsequent testing. The blood drawing device generally consists of a cylindrical barrel open at one end and having a double cannula mounted on the end opposite the open end. The double cannula includes two sharp needles mounted together with a passage way connecting the two. One end of the cannula is inserted into the patient's arm and the other, extending into the cylindrical barrel of the blood drawing device, pierces the puncture pad on the end of a blood sample tube. The blood sample tube is generally shipped with a slight vacuum which is sealed inside by the puncture pad. The vacuum assists in drawing the blood into the tube. A typical double cannula is a VACUTAINER BRAND

MULTIPLE SAMPLE NEEDLE as manufactured by Becton-Dickson, Inc.

5 A disposable blood collection device is disclosed in U.S. patent 5,070,885 in which the double cannula is retractable into the device after use. The retracting mechanism as shown is quite cumbersome requiring a rotation to unlock the cannula carrier which is retracted. Additionally, while a cap is provided to close the open rear end of the device, nothing is provided to cover the  
10 opposite end which is left open after the carrier and double cannula have been retracted. In addition the barrel of the blood collection device necessarily includes a slot for the tab that extends outside the barrel for sliding the carrier back into the barrel. This slot can potentially  
15 allow blood to leak out.

It is a feature of the present invention that an easily retractable double cannula carrier is provided within a blood collection device while still providing secure retention of the cannula in the use position.

20 It is a further feature of the present invention that both open ends of the blood collection device are closed after retraction of the cannula.

It is a further feature of the present invention that there is no slot in the barrel for retracting the cannula.

25 It is a further feature of the present invention that the cannula is retracted automatically.

#### SUMMARY OF THE INVENTION

To protect against accidental needle prick, a blood collection device is provided wherein the double cannula is retractable within the device after all blood samples are  
30 taken. The device comprises a hollow barrel or tube of semi-rigid plastic material into which the double cannula can be retracted after use. A slidable carrier is provided onto which the double cannula may be mounted. A compressed  
35 spring is mounted between the carrier and the proximal end of the barrel to bias the carrier backwardly into the carrier. A releasable retaining means is provided to hold the needle carrier at the proximal end. The needle extends

through an opening in the end of the cap which is covered by a puncture pad. When the releasable retaining means is released the compressed spring pushes the needle carrier back up completely into the barrel. The puncture pad seals the opening in the cap. Near the distal end of the barrel an internal ridge is provided to provide a stop for the carrier in the fully retracted position. A cap is provided to cover the distal open end with the puncture pad sealing the proximal end.

10 BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a side elevational view in partial cross section of the blood drawing device showing the double cannula in the exposed position.

15 FIG. 2 is a side elevational view in partial cross section of the blood drawing device showing the double cannula in the retracted position.

FIG. 3 is a front view of the releasable retaining means used to hold the carrier and cannula at the proximal end.

FIG. 4 is a view taken along line 4-4 in FIG. 2.

20 FIG. 5 is a top view of the blood collection device with the double cannula in the exposed position.

FIG. 6 is a view taken along line 6-6 in FIG. 2.

FIG. 7 is a perspective view of the blood collection with the double cannula in the exposed position.

25 DESCRIPTION OF THE PREFERRED EMBODIMENT

For a detailed description of the preferred embodiment the reader is referred to the appended figures in which like components are given like numerals for ease of reference. For reference purposes the term "proximal end" refers to the end of the device from which the exposed cannula extends and the term "distal end" refers to the end into which the blood sample tube is placed.

35 Referring first to FIG. 1 and FIG. 2 there is shown an embodiment of the present invention in partial cross section. The invention is shown to comprise a hollow cylindrical barrel 10 having a finger flange 11 for ease of handling at the distal end. The distal end is open while the opposite or proximal end is shown to have a

reduced bore 17 through neck 15 and into barrel 10. The narrow neck 15 includes an external ridge 16 at the proximal end about which is secured rubber puncture pad 80. The hollow barrel 10 defines a chamber 100 for receiving a vacuum blood sample drawing tube (not shown). A radially extending tab 14 is provided near the proximal end to protect the releasable means 70 and prevent inadvertent release. Inside the barrel 10 is provided a radially extending ridge 13 which acts as a stop for the carrier when released. The ridge 13 is longitudinally placed such that when the carrier stops in the barrel both the proximal and distal ends of the double cannula are contained within the barrel as shown in FIG. 2. A cap 20 is provided to plug the open distal end of the barrel after use and is attached to the barrel 10 by flexible strap 24. The cap is locked into the closed position by tapered tab 22 which engages internal notch 12 inside of barrel 10.

In the proximal end of the barrel is located needle carrier 30 surrounded by compressed spring 60 which biases the needle carrier inward of the barrel and toward the distal end. Extending through the needle carrier is hypodermic needle 40. The needle 40 extends through the needle carrier 30 to provide a double cannula having a proximal end 41 and distal end 42. A flexible rubber tube 50 surrounds the distal end 42 of the double cannula 40 to prevent blood from escaping into the barrel while inserting the proximal end 41 and before and between sample tube insertions. The end of the needle carrier 30 is passed through the releasable retaining means 70 with the proximal end 41 of the needle extending through bore 17. A rubber puncture pad 15 covers the opening through which the needle is passed.

Referring now to FIG. 3 the releasable retaining means is seen to comprise a small plate 71 having an opening 74 near the top which is slightly larger in diameter than the needle carrier. In addition the plate 71 has a slot 73 extending downward from the opening 74 which is slightly smaller in diameter than the needle carrier and which

engages a circumferential groove 31 (seen in FIG. 2) near the proximal end of the needle carrier 30 to hold the needle carrier at the proximal end as shown in FIG. 1. At the top of the plate is a tab 72 which extends distally along the barrel when the plate is placed in the proximal end of the blood drawing device.

FIG. 4 is a view taken along line 4-4 of FIG. 2 and is included for clarity. As shown the barrel 10 is contemplated to be a single molded piece having a reduced internal bore 17 at the proximal end by extending the inner wall radially inwardly as at 18 to provide strength. A slot 19 is provided through the wall 18 to receive the retaining means. FIG. 6 provides further clarity showing the barrel 10 and extended inner wall 18 and tab 14. The retaining means is shown in the depressed position exposing plate 71, opening 74 and top of slot 73.

FIG. 5 is a top view of the blood drawing device in plan view while FIG. 6 is a perspective view of the blood drawing device. In both FIGS. the proximal end 41 of the double cannula is exposed.

In use the proximal end 41 of the double cannula 40 is inserted into the patient. A vacuum blood sample drawing tube is placed into the chamber 100 and the distal end 42 of the double cannula pierces the rubber over 50 and the stopper of the tube. After the final blood sample has been taken the tab 72 is depressed aligning the opening 74 with the carrier and allowing the spring 60 to push the carrier backward into the barrel until the carrier abuts the ridge 13. The rubber puncture pad 80 is self sealing and seals the proximal end of the device. The cap 20 is then placed over the distal end of the barrel and the entire sealed blood drawing device may be disposed of.

The invention claimed is:

1. A blood collection device comprising
  - a hollow cylindrical barrel having a proximal end and a distal end;
  - a needle carrier mounted in said proximal end and surrounded by a compressed spring surrounding said carrier which biases said carrier inward of said barrel and toward the distal end of said barrel;
  - a releasable retaining means mounted about said needle carrier to retain said needle carrier at the proximal end of said barrel and when released allows said spring to push said needle carrier inward of said barrel and toward the distal end of said barrel;
  - a resealable puncture pad covering said proximal end of said barrel; and
  - a double cannula mounted on said needle carrier such that the proximal end of said double cannula extends outward of said proximal end of said barrel and through said puncture pad.
2. The blood collection device of claim 1 further comprising a cap to close said distal end.
3. The blood collection device according to claim 1 further comprising means to prevent inadvertent release of said releasable retaining means.
4. The blood collection device according to claim 1 wherein said needle carrier has a circumferential groove near its proximal end and said releasable retaining means comprises
  - (i) a plate slidably mounted between said cap and said barrel,
  - (ii) a slot in said plate which engages said circumferential groove, and
  - (iii) an opening above said slot which is slightly larger in diameter than said needle carrier.
5. The blood collection device according to claim 1 further comprising a radially extending internal ridge in said barrel to stop the rearward movement of said carrier when released.



6. A blood collection device comprising

a hollow cylindrical barrel having a proximal end and a distal end;

a slot through said barrel near the proximal end;

a radially extending internal ridge in said barrel to stop the rearward movement of said carrier when released

a needle carrier mounted in said proximal end and surrounded by a compressed spring surrounding said carrier which biases said carrier inward of said barrel and toward the distal end of said barrel;

a circumferential groove near the proximal end of said carrier;

a releasable retaining means mounted about said needle carrier to retain said needle carrier at the proximal end of said barrel and when released allows said spring to push said needle carrier inward of said barrel and toward the distal end of said barrel said retaining means comprising,

(i) a plate slidably mounted in said slot,

(ii) a second slot in said plate which engages said circumferential groove, and

(iii) an opening above said second slot which is slightly larger in diameter than said needle carrier;

a resealable puncture pad covering said proximal end of said barrel; and

a double cannula mounted on said needle carrier such that the proximal end of said double cannula extends outward of said proximal end of said barrel and through said puncture pad.

1/2

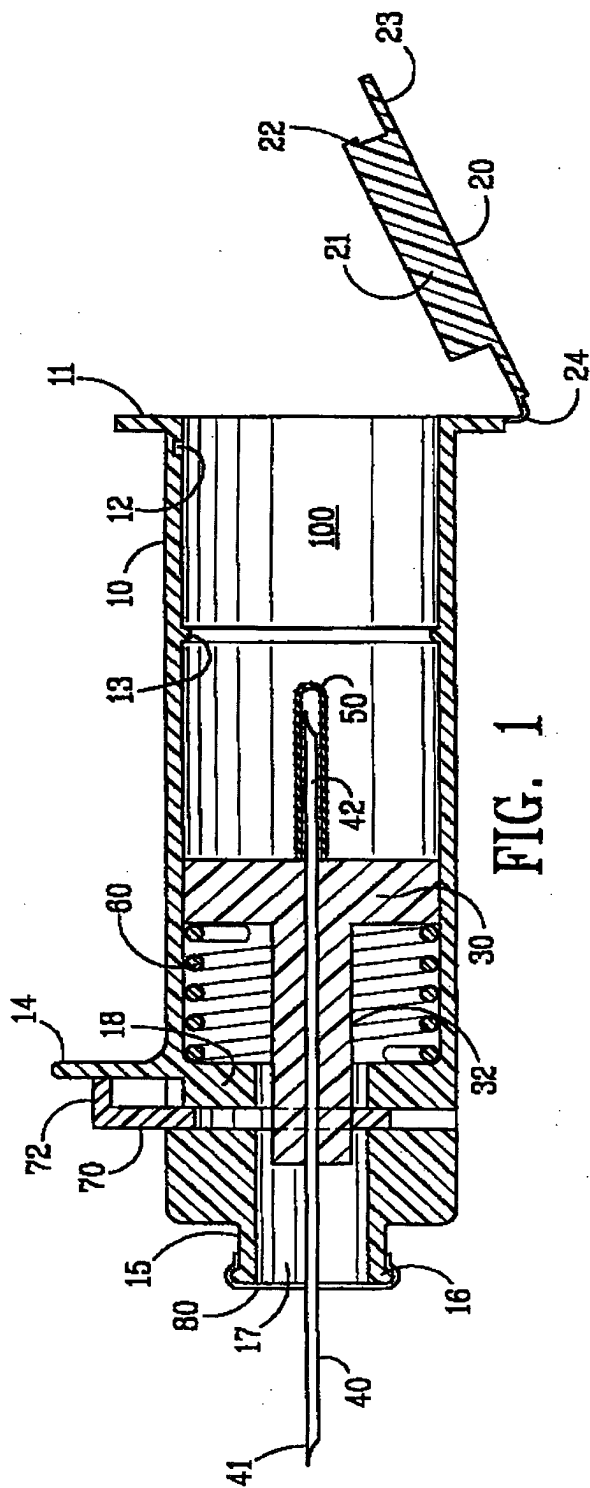


FIG. 1

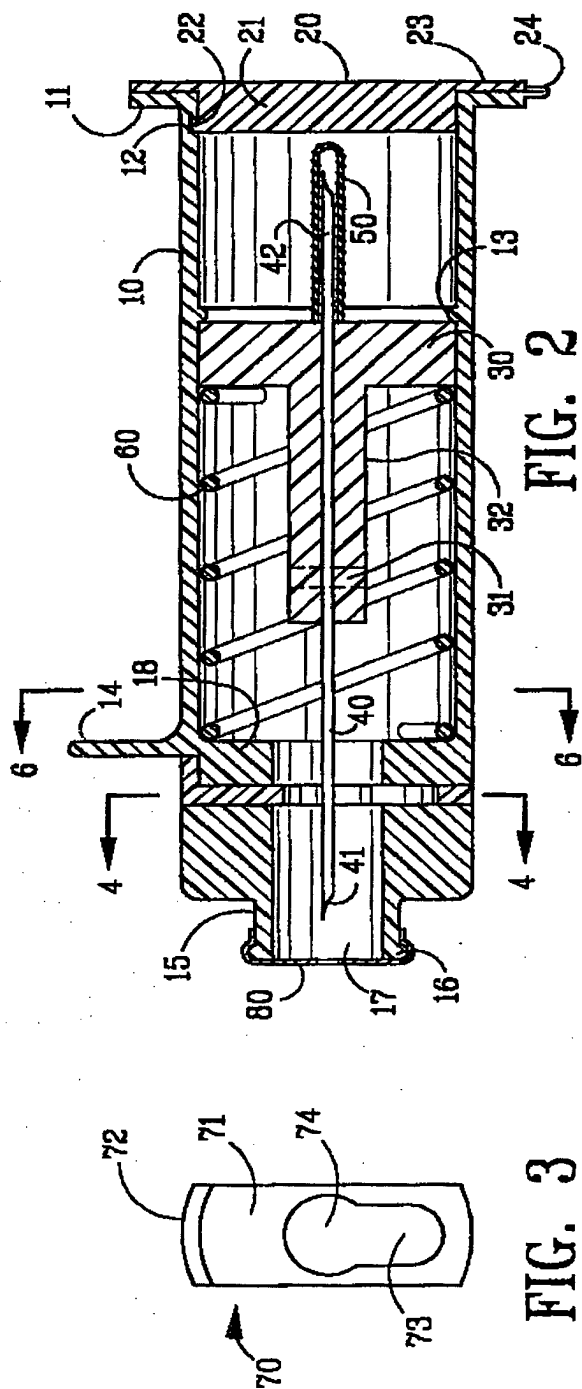


FIG. 2

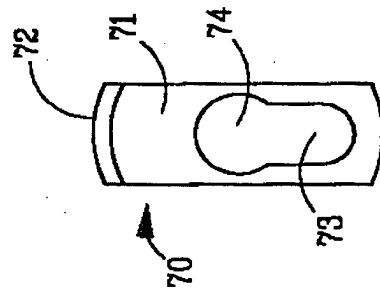


FIG. 3

2/2




FIG. 4

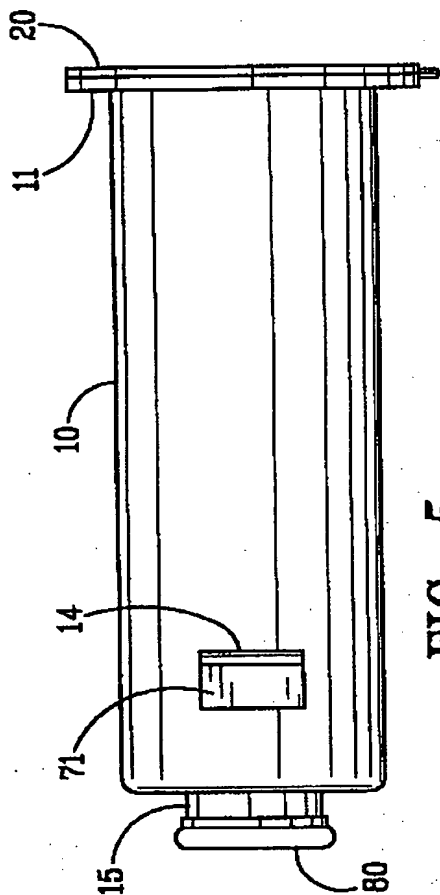


FIG. 5

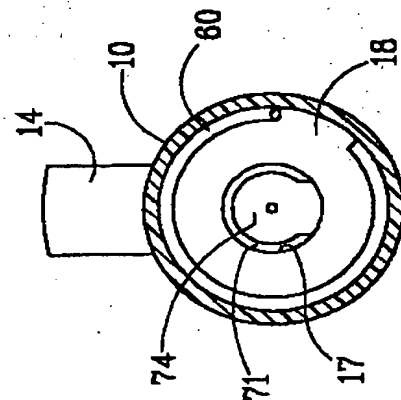


FIG. 6

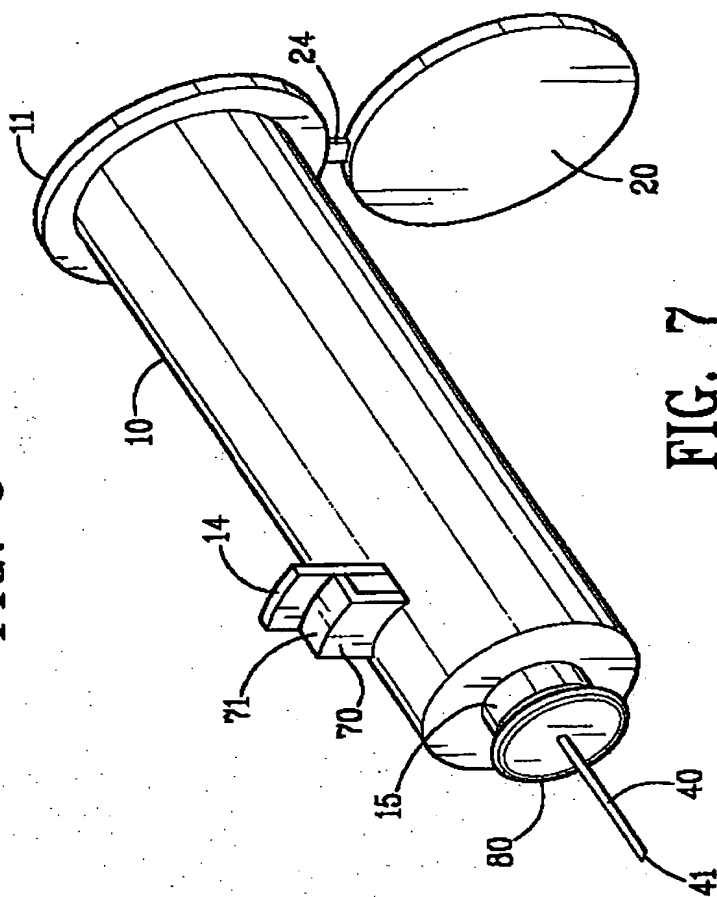


FIG. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/04616

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
IPC(6) : A61M 5/00 US CL : 604/195 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) U.S. : 128/763-766; 604/110, 187, 192, 198, 263		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,423,758 A (SHAW) 13 June 1995, entire document.	1-6
A	US 4,841,985 A (WANAMAKER) 27 June 1989, entire document.	1-6
A	US 5,487,732 A (JEFFREY) 30 January 1996, entire document.	1-6
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"B" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"A"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search 23 APRIL 1998	Date of mailing of the international search report 05 MAY 1998	
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer <i>John Yasko, Jr.</i> JOHN YASKO, JR. Telephone No. (703) 308-2986	

Form PCT/ISA/210 (second sheet)(July 1992)\*

BEST AVAILABLE COPY